



Digital VA meter – Single Phase AC supply



schnell

Product Features


- ⚡ Wide AC operating Voltage
- ⚡ Accuracy Class 2.0
- ⚡ Scrolling LED Displays for Voltage and Current
- ⚡ Plug and Play connectors
- ⚡ No configurations, Switches ON and starts functioning




Application

- ⚡ Electrical Distribution Control & Relay Panel
- ⚡ Power Control Panels
- ⚡ Motor Control Panels
- ⚡ Generator Control Panels
- ⚡ Test Benches and Laboratory Equipment
- ⚡ Wind Energy and Co-Generation Plants
- ⚡ Air Conditioning/Refrigeration Plants

Mechanical Details

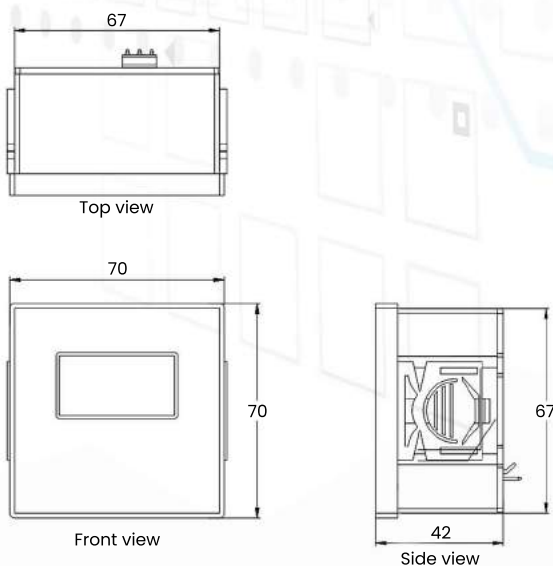

Wiring Details

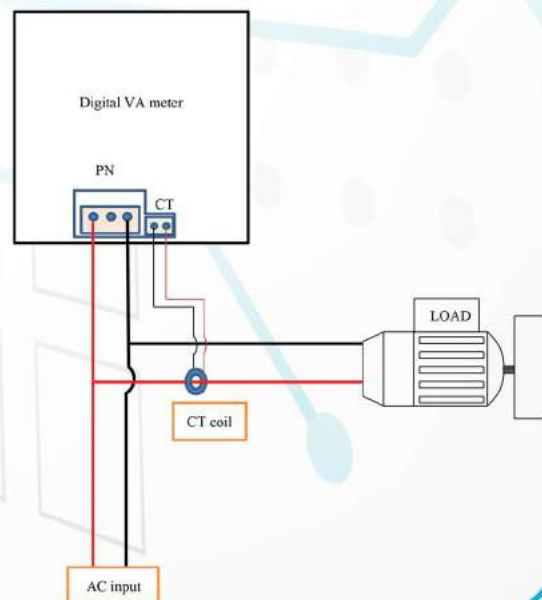

Technical Specifications

Parameter	Value
Nominal Input Voltage - 1 Phase	230VAC
Working Voltage Range - 1 Phase	100VAC - 300VAC
Current Measurement Range (Ext. CT)	0-30A (can be extended up to 50A for large volume of orders)
Input Frequency Range	47-53Hz
Metering Accuracy (both V and I)	Class 2.0 @ FSR
Display	3 Digit 0.56" 7 Segment LED Display
Enclosure	Panel Door Mount Enclosure
Product Dimensions	70 X 70 X 42 in mm
Panel Cutout Dimensions	67 X 67 in mm
Weight	80 grams
Operating Conditions	0°C to +60°C, 90% Non-Condensing
Load ON/OFF status	Factory set value is 1A. Configurable based on the request for large volume of orders.

Product Accessories



CT coil with pluggable connector



3 Pin female connector for AC input supply



Mounting bracket

No. 6/4, Ranganayaki Nagar,
Lions Club Building,
Periyanaickenpalayam,
Coimbatore - 641020.

+91 9500295005

schnell@schnellenergy.com